

Armadilha 15R (flytrap)



The 15 m² free standing or wall mounted insect control unit

With its discreet and attractive design the Armadilha 15R is recommended for use in domestic and professional environments.





Armadilha 15R

The discreet insect light trap for areas up to 15 m²


With its discreet and attractive design the **Armadilha I 5**R is recommended for use in domestic and professional environments.

The **Armadilha I5**R is designed to be placed as either a free-standing or wall-mounted unit. The **Armadilha I5**R uses a powerful ultraviolet lamp which attracts flying insects.

On the inside of the unit a glueboard is placed, which the insects are trapped on.


This glueboard is placed out of sight providing discreet control of the flying insect pests. **Armadilha 15**R is easy to install, easy to service and safe to use.

The unit is designed for indoor use only



- In its free-standing or wall mounted position, the unit offers full discretion.
- Unit can be used in a wide variety of applications
- Glue board discreetly placed out of sight and is easy to replace from the top.
- · Plastic housing offers durability.
- Effective coverage of areas up to 15 m².
- Easy to service with direct access to lamp and glue board.
- Meets ISO 9001 / RoHS & the CE standard. Unit is HACCP compliant.
- The heat entrapment design ensures that insects fly in faster.
- High powered effective UV-A lamp.
- I year full guarantee on the mechanical aspects.



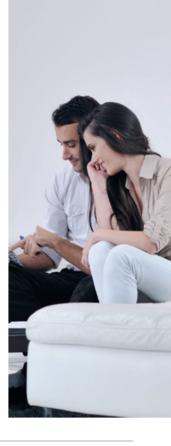

Fruitflies

OPTIONAL

In the top section of the unit you can place a small holder which can contain fruitfly attractant (liquid), used to enhance trapment of fruit flies.



Technical specifications

Area coverage : 15 m² effective coverage

Light source : 1 x 9 Watt Philips UV-A PL-S

Type of lamp : UV-A Lamp RoHS certified

Position : Free-standing or wall-mounted

Electrical supply : $230 \,\text{V} \sim 50 \,\text{Hz}$

Catch specifications : Temperature optimised glue board

Power consumption : 12 Watt
Weight : 1 Kg

Material : Plastic housing

Degree of protection : IP 20

Colour : White/Black

Int. building norm : acc. IEC 60.335-259 int. std

Guarantee : I year return to base

Lamp life time : 9000 hrs

Dimensions (LxDxH) : \varnothing 140 x 280 mm

CE-approval : Yes